




**PFAS-free products -  
we pay attention**

**micro resist  
technology**

# Negative Photoresists for UV, Laser & Electron Beam Lithography

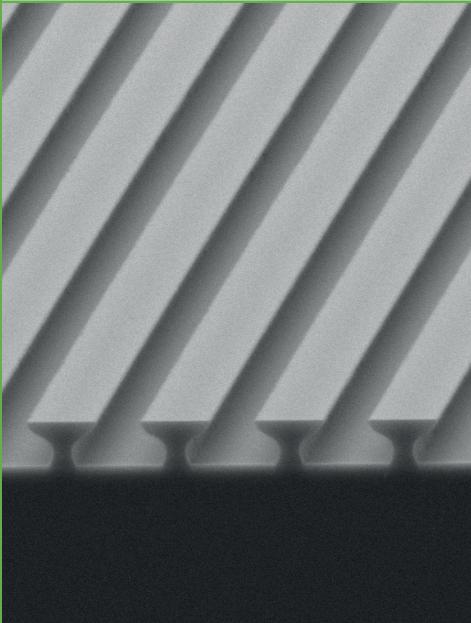

- ma-N 400
- ma-N 1400
- ma-N 2400
- mr-EBL 6000 and mr-UVL 6000
- mr-DWL
- EpoCore and EpoClad

#### Unique features of the negative photoresists

- Different negative photoresists series designed for various applications:
  - conventional pattern transfer
  - lift-off process
  - use as permanent material
- Ready-to-use solutions in a variety of viscosities

- Made in Germany -



**micro resist technology GmbH**  
Gesellschaft für chemische Materialien spezieller Photoresistsysteme mbH

Köpenicker Str. 325  
12555 Berlin  
GERMANY

phone +49 30 64 16 70 100  
fax +49 30 64 16 70 200  
mail sales@microresist.de  
info www.microresist.com


[www.microresist.com](http://www.microresist.com)

## For Conventional Pattern Transfer and Single Layer Lift-Off

Resist	ma-N 400	ma-N 1400
Spectral sensitivity	300 – 380 nm	300 – 410 nm
Exposure dose @ 365 nm	350 – 1900 mJ/cm <sup>2</sup>	300 – 700 mJ/cm <sup>2</sup>
Ready-to-use solutions for various film thicknesses @ 3000 rpm	ma-N 402 → 0.2 µm ma-N 405 → 0.5 µm ma-N 415 → 1.5 µm ma-N 420 → 2.0 µm ma-N 440 → 4.1 µm ma-N 490 → 7.5 µm	ma-N 1405 → 0.5 µm ma-N 1407 → 0.7 µm ma-N 1410 → 1.0 µm ma-N 1420 → 2.0 µm ma-N 1440 → 4.0 µm
Thermal stability	up to 110 °C for metal evaporation	up to 160 °C for metal evaporation and sputtering
Developer	ma-D 331/S, ma-D 332/S (NaOH based) ma-D 530/S, ma-D 531/S, ma-D 532/S (TMAH based)	ma-D 533/S (TMAH based)

### ma-N 1400

Undercut patterns of 2.2 µm thick ma-N 1420

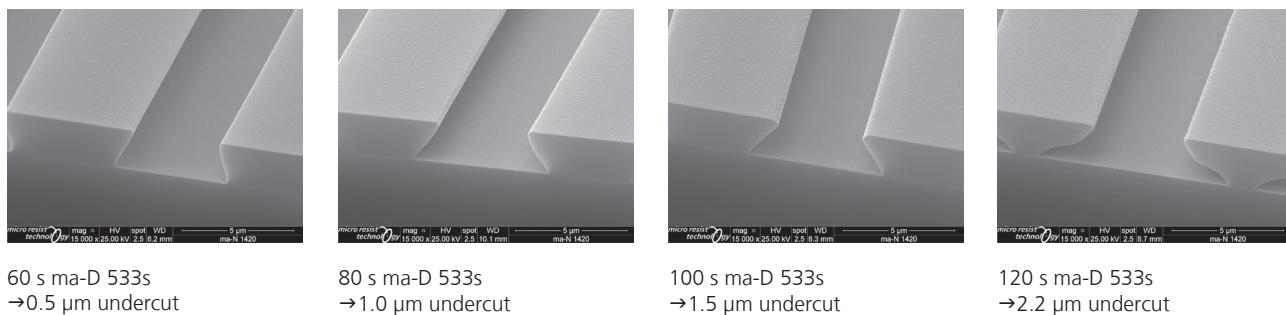



### ma-N 400 and ma-N 1400 for conventional pattern transfer, physical vapour deposition (PVD), and lift-off

These two series are mainly used as single layer resist for pattern transfer by PVD and lift-off.

- Tunable pattern profile: vertical to undercut
- Aqueous alkaline development
- Good - excellent thermal pattern stability
- High wet and dry etch resistance
- Easy to remove

### Main applications


- Microelectronics and micro system technology
- Mask for lift-off processes
- Etch mask for semiconductors and metals

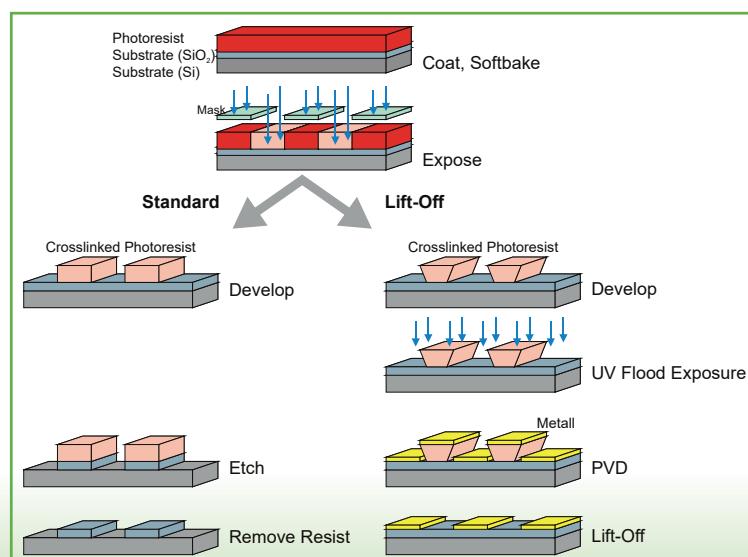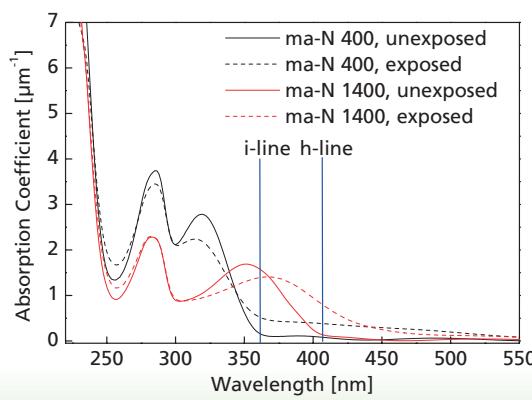


# For Thin Film E-Beam, Deep UV or UV Lithography

Resist	ma-N 2400	mr-EBL 6000	mr-UVL 6000
Exposure dose	@ 10 keV @ 20 keV @ 30 keV @ 50 keV @ 100 keV Deep UV [248 / 254 / 266 nm] UV [300 – 365 nm]	20 – 45 $\mu\text{C}/\text{cm}^2$ 80 – 200 $\mu\text{C}/\text{cm}^2$ 95 – 300 $\mu\text{C}/\text{cm}^2$ 150 – 350 $\mu\text{C}/\text{cm}^2$ 240 – 550 $\mu\text{C}/\text{cm}^2$ 5 – 20 $\text{mJ}/\text{cm}^2$ - (400 - 550 $\text{mJ}/\text{cm}^2$ )	-
Ready-to-use solutions for various film thicknesses @ 3000 rpm	ma-N 2401 → 0.1 $\mu\text{m}$ ma-N 2403 → 0.3 $\mu\text{m}$ ma-N 2405 → 0.5 $\mu\text{m}$ ma-N 2410 → 1.0 $\mu\text{m}$	mr-EBL 6000.1 → 0.1 $\mu\text{m}$ mr-EBL 6000.3 → 0.3 $\mu\text{m}$ mr-EBL 6000.5 → 0.5 $\mu\text{m}$	mr-UVL 6000.1 → 0.1 $\mu\text{m}$ mr-UVL 6000.3 → 0.3 $\mu\text{m}$ mr-UVL 6000.5 → 0.5 $\mu\text{m}$
Developer	ma-D 525 (TMAH based) ma-D 332/ ma-D 331 (NaOH based)		mr-Dev 600 (solvent based)

ma-N 2400

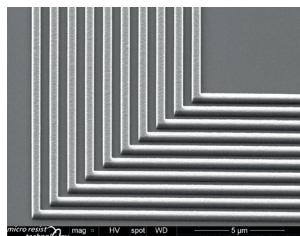


500 nm thick resist  
elbow pattern

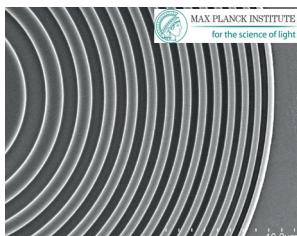


250 nm thick resist  
Fresnel pattern  
(Courtesy of Max Planck Institute for  
the Science of Light, Germany)

mr-EBL 6000

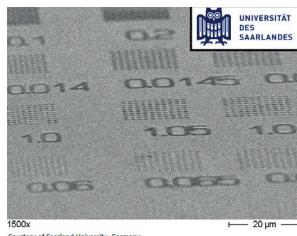

120 nm thick resist pattern,  
resolution < 100 nm

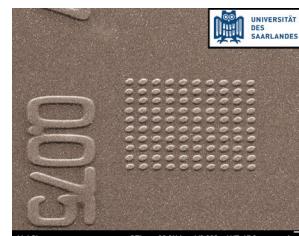

98 nm SiC dots 70 nm thick, after ICP  
RIE  $\text{SF}_6$  etching (150 W RF, 200 W) &  
resist removal

(Pictures - Courtesy of Saarland University, Germany)


## ma-N 2400, mr-EBL 6000, and mr-UVL 6000 for pattern transfer

### ma-N 2400 e-beam & Deep UV sensitive

- High resolution capability
- Aqueous alkaline development
- Good thermal stability of the resist patterns
- High wet and dry etch resistance
- Lift-off
- Easy to remove

### mr-EBL 6000 high e-beam sensitivity

- Excellent thermal stability of the resist patterns
- High dry and wet etch resistance
- High resolution capability
- Post exposure bake (PEB)

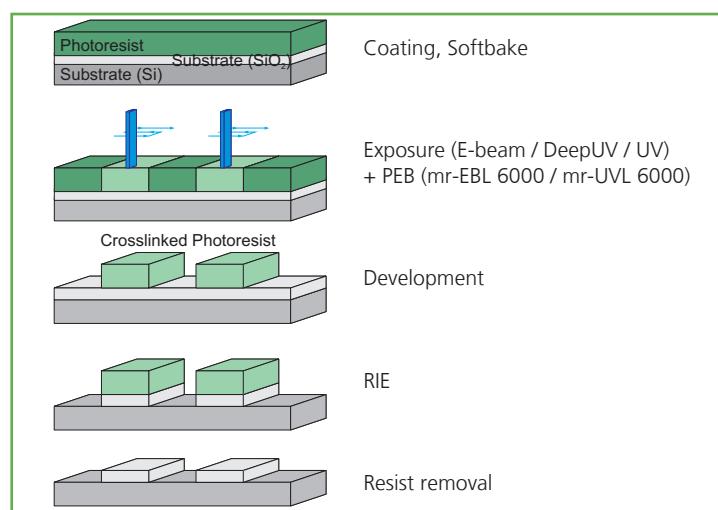

### mr-UVL 6000 thin layer UV lithography

- High dry and wet etch resistance
- Excellent thermal stability of the resist patterns
- Post exposure bake (PEB)


### Main applications

- Use in micro- and nanoelectronics
- Manufacturing of semiconductor devices
- Mask for etching, e.g. Si,  $\text{SiO}_2$ ,  $\text{Si}_3\text{N}_4$  or metals
- Generation of sub 100 nm pattern
- Generation of stamps with nanopatterns

## Highly transparent Materials for Low Optical Loss and Standard Applications

mr-DWL @ 405 nm for Direct Laser Writing (DLW) @ 405 nm & Two Photon Polymerization (2PP)

Resist	mr-DWL
Spectral sensitivity	High sensitivity > 400 nm DLW @ 405 nm
Ready-to-use solutions for various film thicknesses	mr-DWL 5: 3 µm → 12 µm mr-DWL 40: 20 µm → 100 µm mr-DWL 100: 20 µm → 150 µm
Developer	mr-Dev 600 (solvent based)


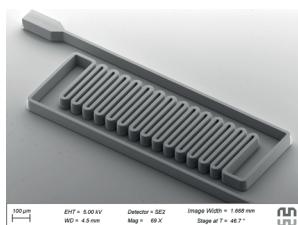


DLW 80 µm





70 µm thick, 2PP

(pictures - DLW: Courtesy of Heiderberg Instruments, 2PP: Fraunhofer IPT Aachen, Germany)

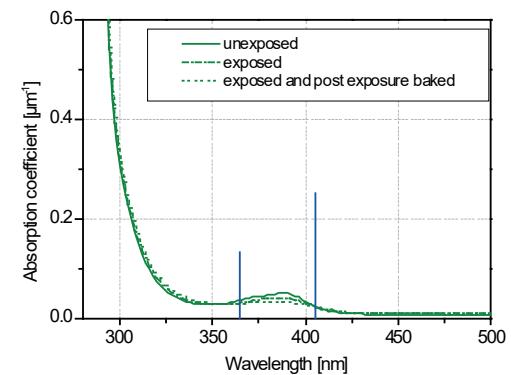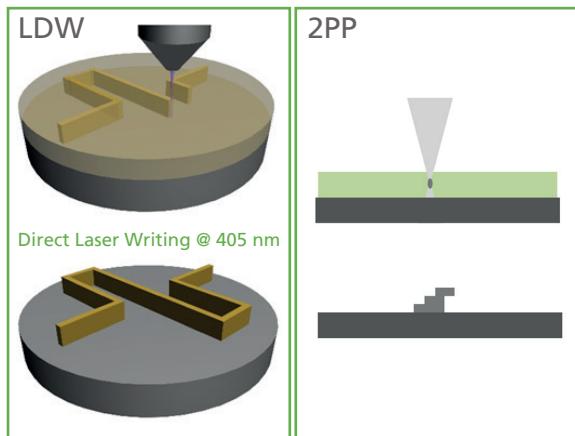


## EpoCore / EpoClad for preparation of polymer waveguides

Resist	EpoCore	EpoClad
Spectral sensitivity	Broadband, 365 nm	
Ready-to-use solutions for various film thicknesses from 1.5 µm to 120 µm	EpoCore 2 EpoCore 5 EpoCore 10 EpoCore 20 EpoCore 50	EpoClad 2 EpoClad 5 EpoClad 10 EpoClad 20 EpoClad 50
Developer	mr-Dev 600 (solvent based)	
Properties of cured resist		
Shrinkage	< 3 %	
Thermal stability	up to 230 °C	
Refractive index @ 830 nm	1.58	1.57
Optical loss	~ 0.2 dB/cm @ 850 nm	
Glass transition temperature	> 180 °C	
Excellent stability after lamination	T > 185°C, pressure 23 kp/cm <sup>2</sup> and reflow tests 3 x 15 s @ 230 °C, TCT: 240 x -40 °C to 120 °C	

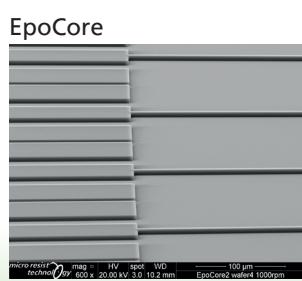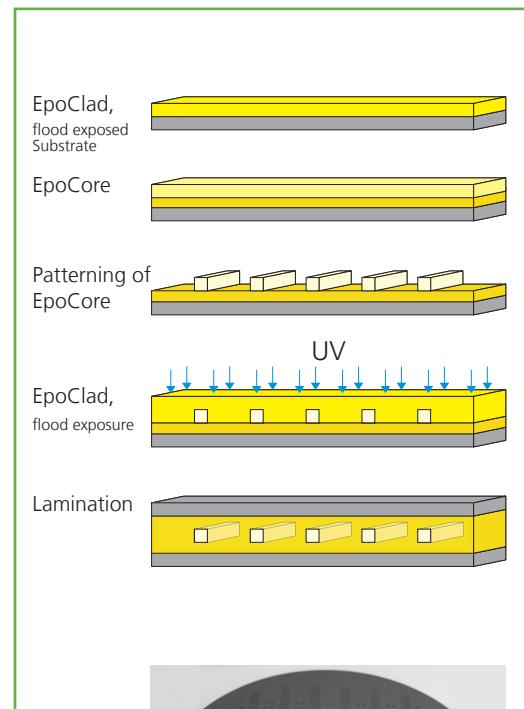

5 µm thick

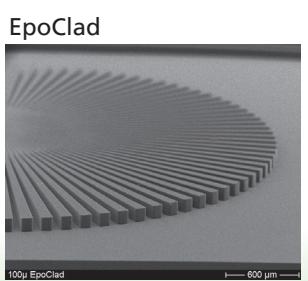

100 µm thick

## Main applications

Singlemode (SM) and Multimode (MM) polymeric optical waveguides

